



PBGA/ТЕРРBGA

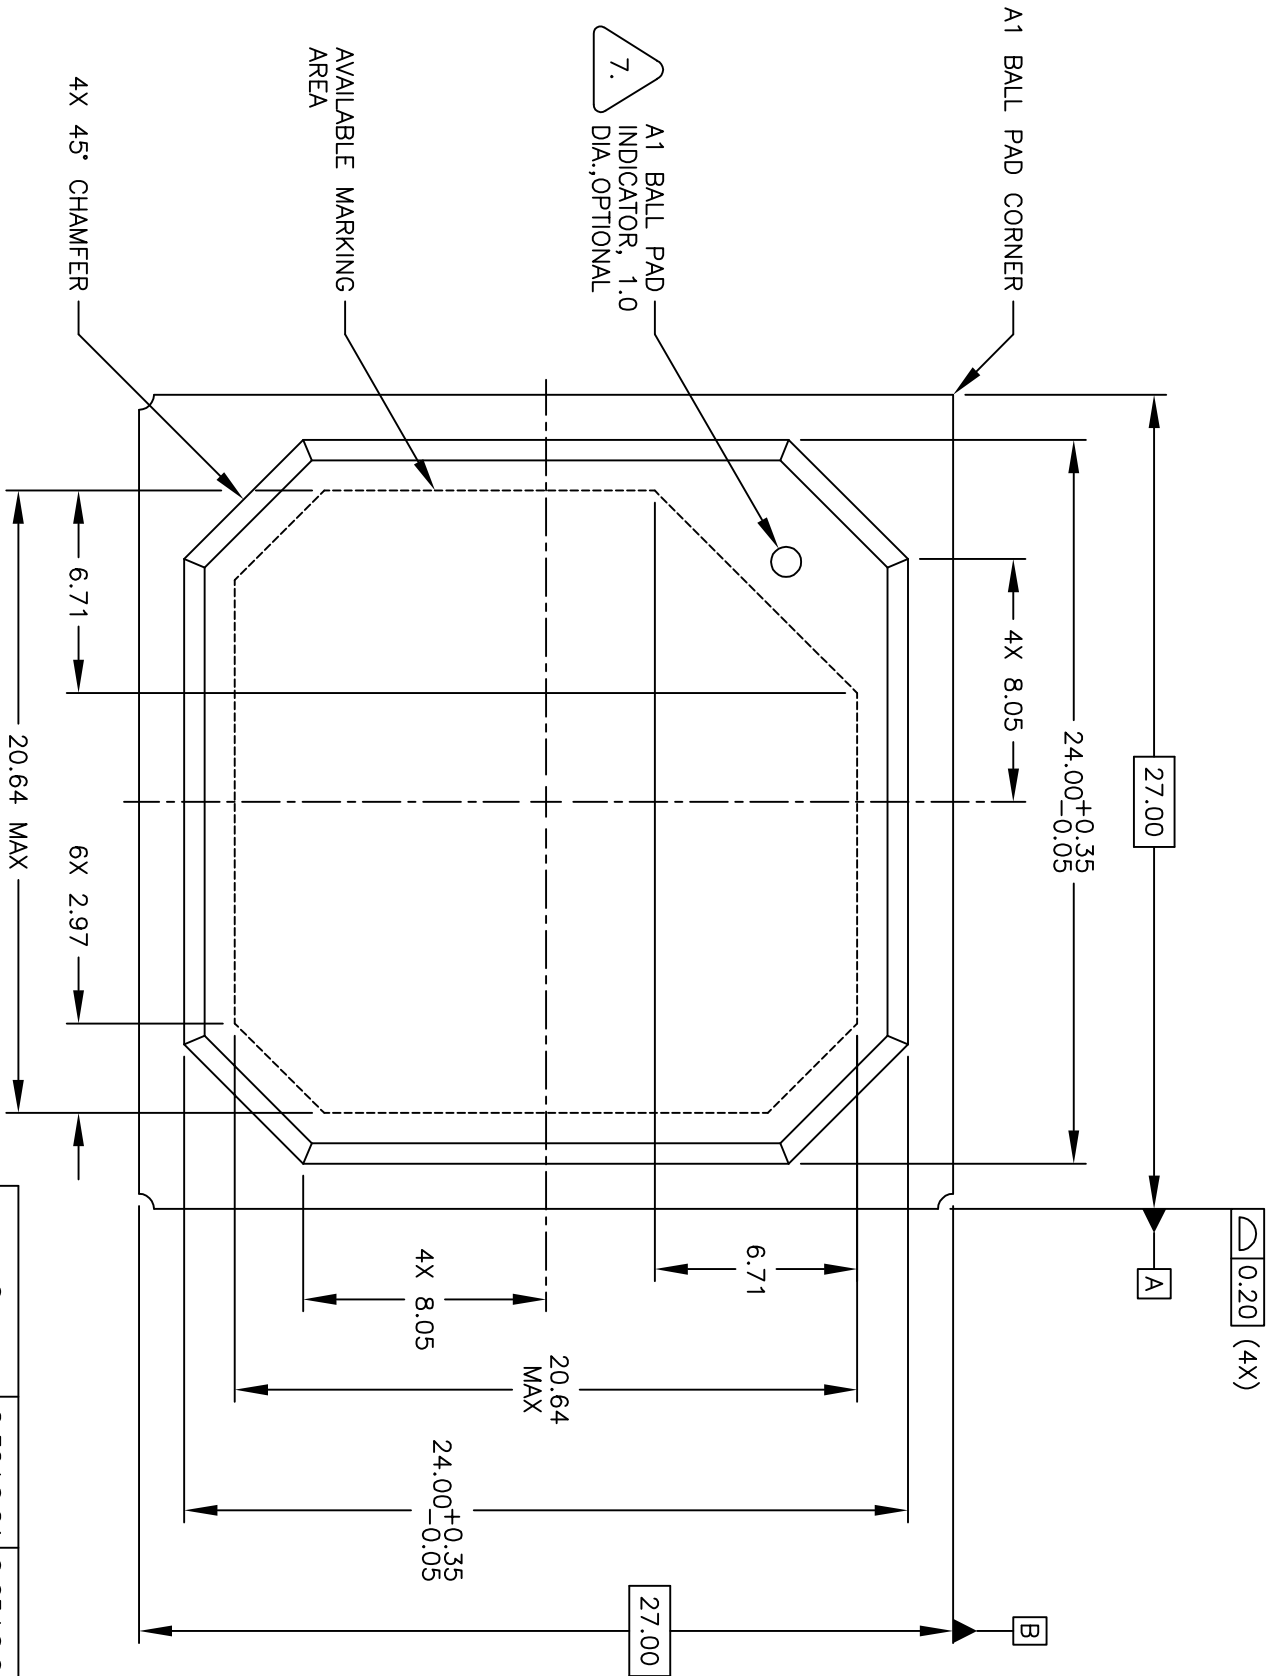

TOP VIEW

|                                 |                                        |                                        |                    |
|---------------------------------|----------------------------------------|----------------------------------------|--------------------|
| 6                               | 2.32±0.21                              | 0.65±0.06                              | 3 CORE             |
| 6                               | 2.28±0.21                              | 0.61±0.06                              | 2 CORE             |
| 4                               | 2.23±0.21                              | 0.56±0.06                              | THERMALLY ENHANCED |
| 4                               | 2.23±0.21                              | 0.56±0.06                              | STANDARD           |
| 2                               | 2.23 <sup>+0.19</sup> <sub>-0.21</sub> | 0.56 <sup>+0.04</sup> <sub>-0.06</sub> | 0.40 CORE          |
| 2                               | 2.03 <sup>+0.19</sup> <sub>-0.21</sub> | 0.36 <sup>+0.04</sup> <sub>-0.06</sub> | STANDARD           |
| NO. LAYERS                      | DIM "A"                                | DIM "B"                                | NOTES              |
| PBGA/ТЕРРBGA THICKNESS SCHEDULE |                                        |                                        |                    |

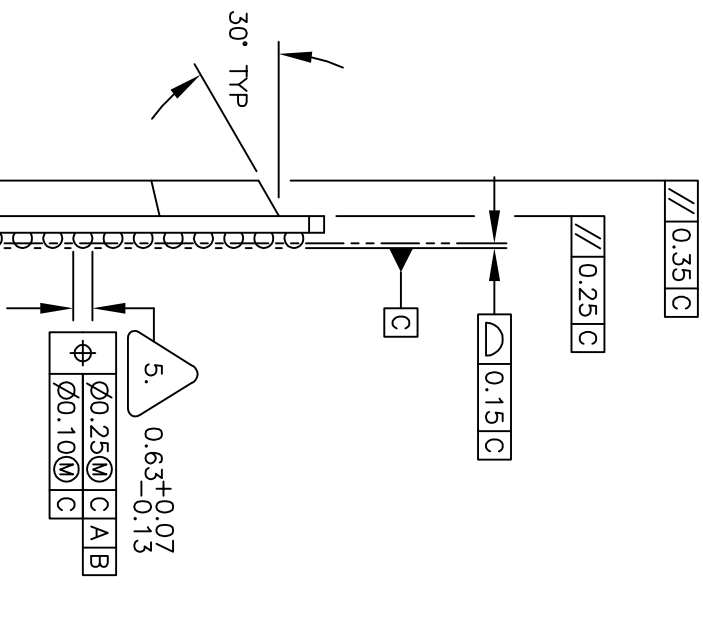

SIDE VIEW

|       |            |              |
|-------|------------|--------------|
| SIZE  | DWG NUMBER | REV          |
| A3    | 74725      | 11           |
| SCALE | 4:1        | SHEET 2 OF 8 |