
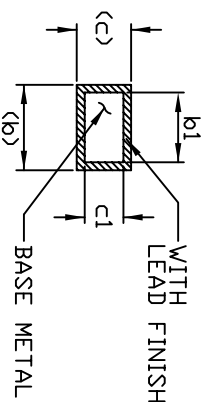


REV.	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE.	8/75	YMK
01	INC. PER DCN #A30973.	9/1	HJC
02	INC. PER DCN #A32099.	9/1	HJC
03	INC. PER DCN #P20217.	12/29	EBA
04	REVISED PER DCN# D22402. ENG-AF-356/A BECDMES 00292/04.	08/05 1995	TYL

TOP EJECTOR PINS MAY BE PRESENT ON AAP2 PARTS.

- NOTES:
1. CONTROLLING DIMENSION: INCH.
 2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
 3. DISTANCE BETWEEN LEADS INCLUDING DAMBAR PROTRUSIONS TO BE .005/0.127MM MINIMUM.
 4. DIMENSIONS A, A1 & L ARE MEASURED WITH THE PACKAGE SEATED IN JEDEC SEATING PLANE GAUGE GS-3.
 5. DIMENSIONS D, D1 AND E1 ARE TO BE MEASURED AT MAXIMUM MATERIAL CONDITION BUT DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH/.254 mm.
 6. E AND ea MEASURED WITH THE LEADS CONSTRAINED TO BE PERPENDICULAR TO DATUM [C].
 7. eb AND ec ARE MEASURED AT THE LEAD TIPS WITH THE LEADS UNCONSTRAINED.
 8. N IS THE MAXIMUM NUMBER OF LEAD POSITIONS.
 9. THIS DRAWING COMPLIANT TO JEDEC STANDARD MS-001, VARIATION AC.
 10. b2 MAXIMUM DIMENSIONS DOES NOT INCLUDE DAMBAR PROTRUSIONS. DAMBAR PROTRUSIONS SHALL NOT EXCEED .010/0.25MM.

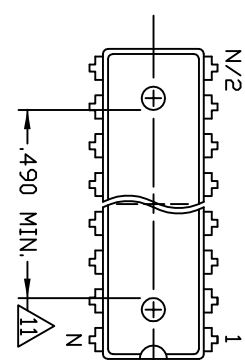

SECTION Z-Z
(VIEW ROTATED 90° CW)

