


REF	DESCRIPTION	UNIT	REVISION	DATE
00	INITIAL RELEASE	08/13	TAL.	TAL.
01	INCORPORATED PER SOA NO. 200114.	08/20	TAL.	TAL.
02	INCORPORATED PER SOA NO. 200863.	08/27	TAL.	TAL.
03	INCORPORATED PER SOA NO. 200182.	11/04	TAL.	TAL.
04	SOA NO. 201101 CHANGES ON SYMBOL C PER 11/03	11/03	THACH	SHINO

- NOTES:
- REFER TO APPLICABLE SYMBOL LIST.
 - DIMENSIONING AND TOLERANCING PER ANSI Y14.5-1982.
 - APPLIES TO SPREAD LEADS PRIOR TO INSTALLATION.
 - N IS THE MAXIMUM QUANTITY OF LEAD POSITIONS.
 - DIMENSIONS D AND E₁ ARE TO BE MEASURED AT MAXIMUM MATERIAL CONDITION BUT DO NOT INCLUDE MOLD FLASH.
 - ALLOWABLE MOLD FLASH IS .010 INCH/.254 mm.
 - CONTROLLING DIMENSION: INCH.
 - DIMENSIONS A, A₁ & L ARE MEASURED WITH THE PACKAGE SEATED IN JEDEC SEATING PLANE GAUGE GS-3.

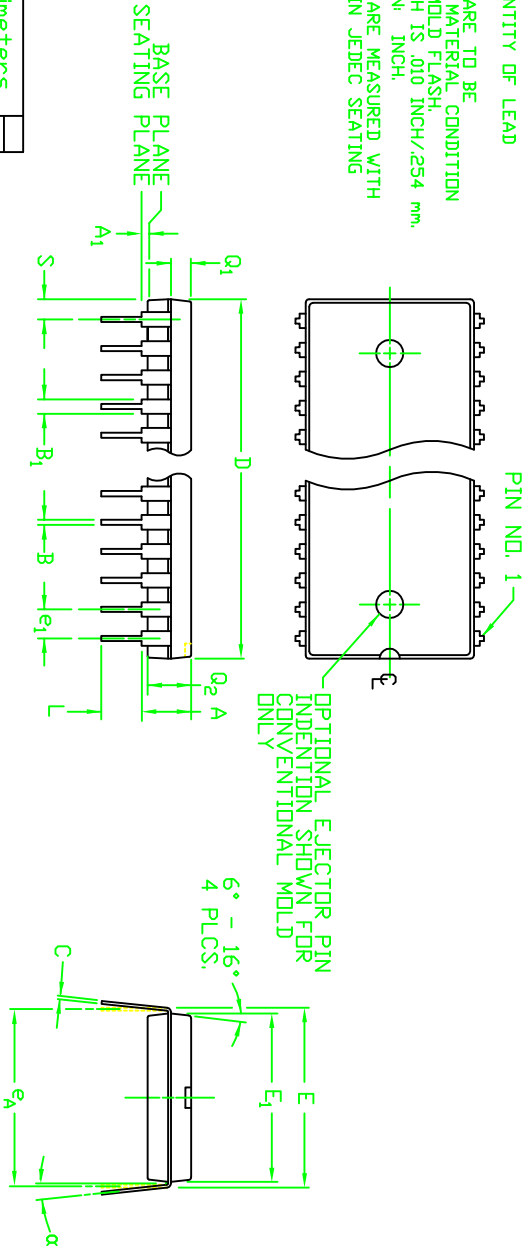

	INCHES	MILLIMETERS
A	MIN. NOM. MAX.	MIN. NOM. MAX.
A	.015	.38
A ₁	.018	.41
B	.016	.41
B ₁	.050	1.27
C	.009	.23
D	1.645	41.78
E	.600	15.24
E ₁	.530	13.46
L	.125	3.18
S	.070	1.78

REVISION	DESCRIPTION	DATE	BY	CHKD	APP'D
1	INITIAL RELEASE	08/13	TAL.	TAL.	TAL.
2	INCORPORATED PER SOA NO. 200114.	08/20	TAL.	TAL.	TAL.
3	INCORPORATED PER SOA NO. 200863.	08/27	TAL.	TAL.	TAL.
4	INCORPORATED PER SOA NO. 200182.	11/04	TAL.	TAL.	TAL.
5	SOA NO. 201101 CHANGES ON SYMBOL C PER 11/03	11/03	THACH	SHINO	SHINO